






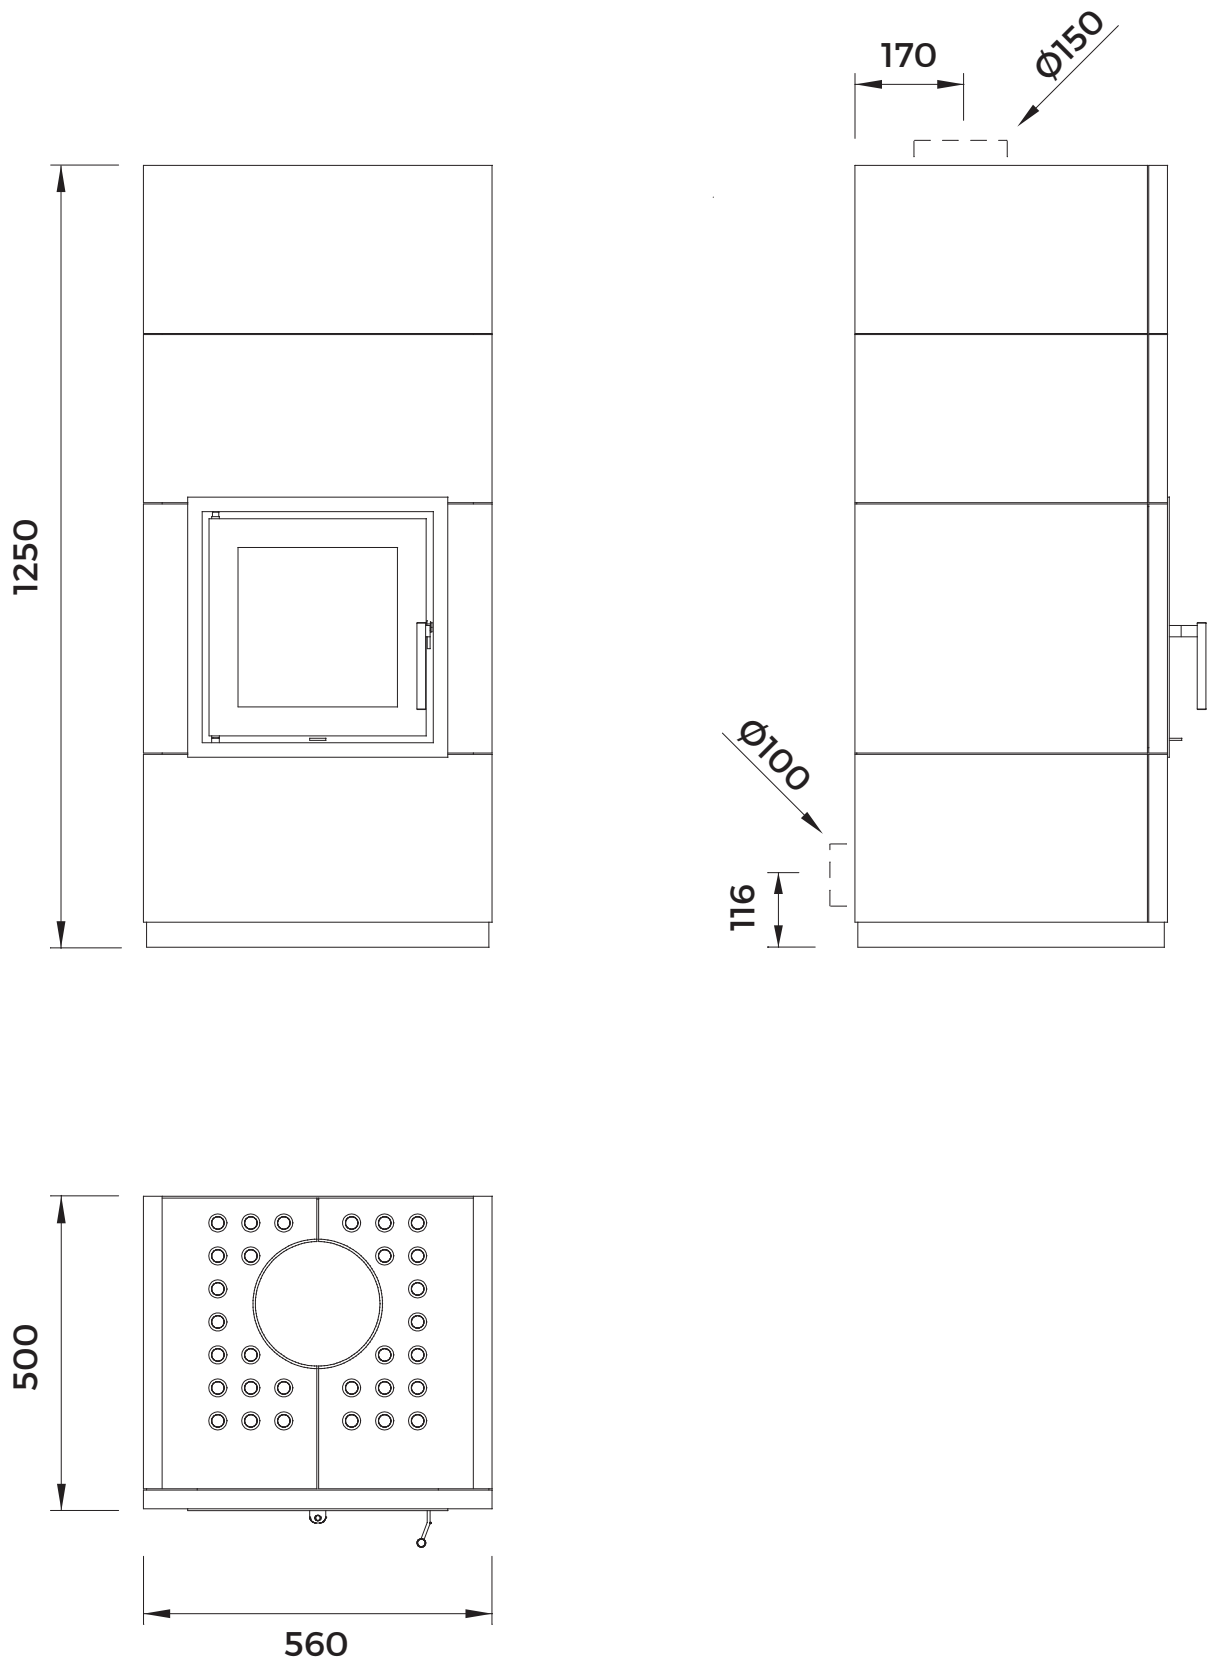


TECHNICAL SPECIFICATIONS










Rated heat output		7,5 Kw
Burned thermal power		9,2 Kw
Efficiency		81,5%
CO (13% O ₂)		822 mg/Nm³
Dust (13% O ₂)		27 mg/Nm³
OGC (13% O ₂)		17 mg/Nm³
NOx (13% O ₂)		82 mg/Nm³
Fuel		Wood logs
Fuel consumption per hour		2,2 Kg/h
Smoke temperature		243 C°
Smoke volume		6,5 g/s
Smoke exhaust		Ø 150
Required draft		12 Pa
Air intake connector		Ø 100
Firechamber dimension		30,5x27x42(h) cm
Weight with tiled cladding		232 Kg
Weight with soapstone cladding		296 Kg
Heat accumulation		4 h
Hybrid		2 Kw
Smart Fire		✓
Quality class M.D. n. 186/2017		★ ★ ★ ★
Energy Efficiency Class		A
Complies with the Austrian law 15 a B-VG		✓
Complies with the German law BimSchV2		✓
Complies with the law Ecodesign 2022		✓
In conformity with standard EN13240		✓
CE marking	CE	✓




All dimensions expressed in millimetres

SINTESI

TECHNICAL SPECIFICATIONS

Rated heat output		12 Kw
Burned thermal power		13,8 Kw
Efficiency		86,5%
CO (13% O ₂)		544 mg/Nm ³
Dust (13% O ₂)		29 mg/Nm ³
OGC (13% O ₂)		20 mg/Nm ³
NOx (13% O ₂)		101 mg/Nm ³
Fuel		Wood logs
Fuel consumption per hour		3,2 Kg/h
Smoke temperature		171 C°
Smoke volume		10,6 g/s
Smoke exhaust		Ø 150
Required draft		10 Pa
Air intake connector		Ø 125
Firechamber dimension		30,5x33x47(h) cm
Weight with tiled cladding		360 Kg
Weight with soapstone cladding		470 Kg
Heat accumulation		6 h
Smart Fire		✓
Quality class M.D. n. 186/2017		★ ★ ★ ★
Conto termico (Italian incentive)		✓
Energy Efficiency Class		
Complies with the Austrian law 15 a B-VG		✓
Complies with the German law BimSchV2		✓
Complies with the law Ecodesign 2022		✓
In conformity with standard EN13240		✓
CE marking		✓

SINTESI

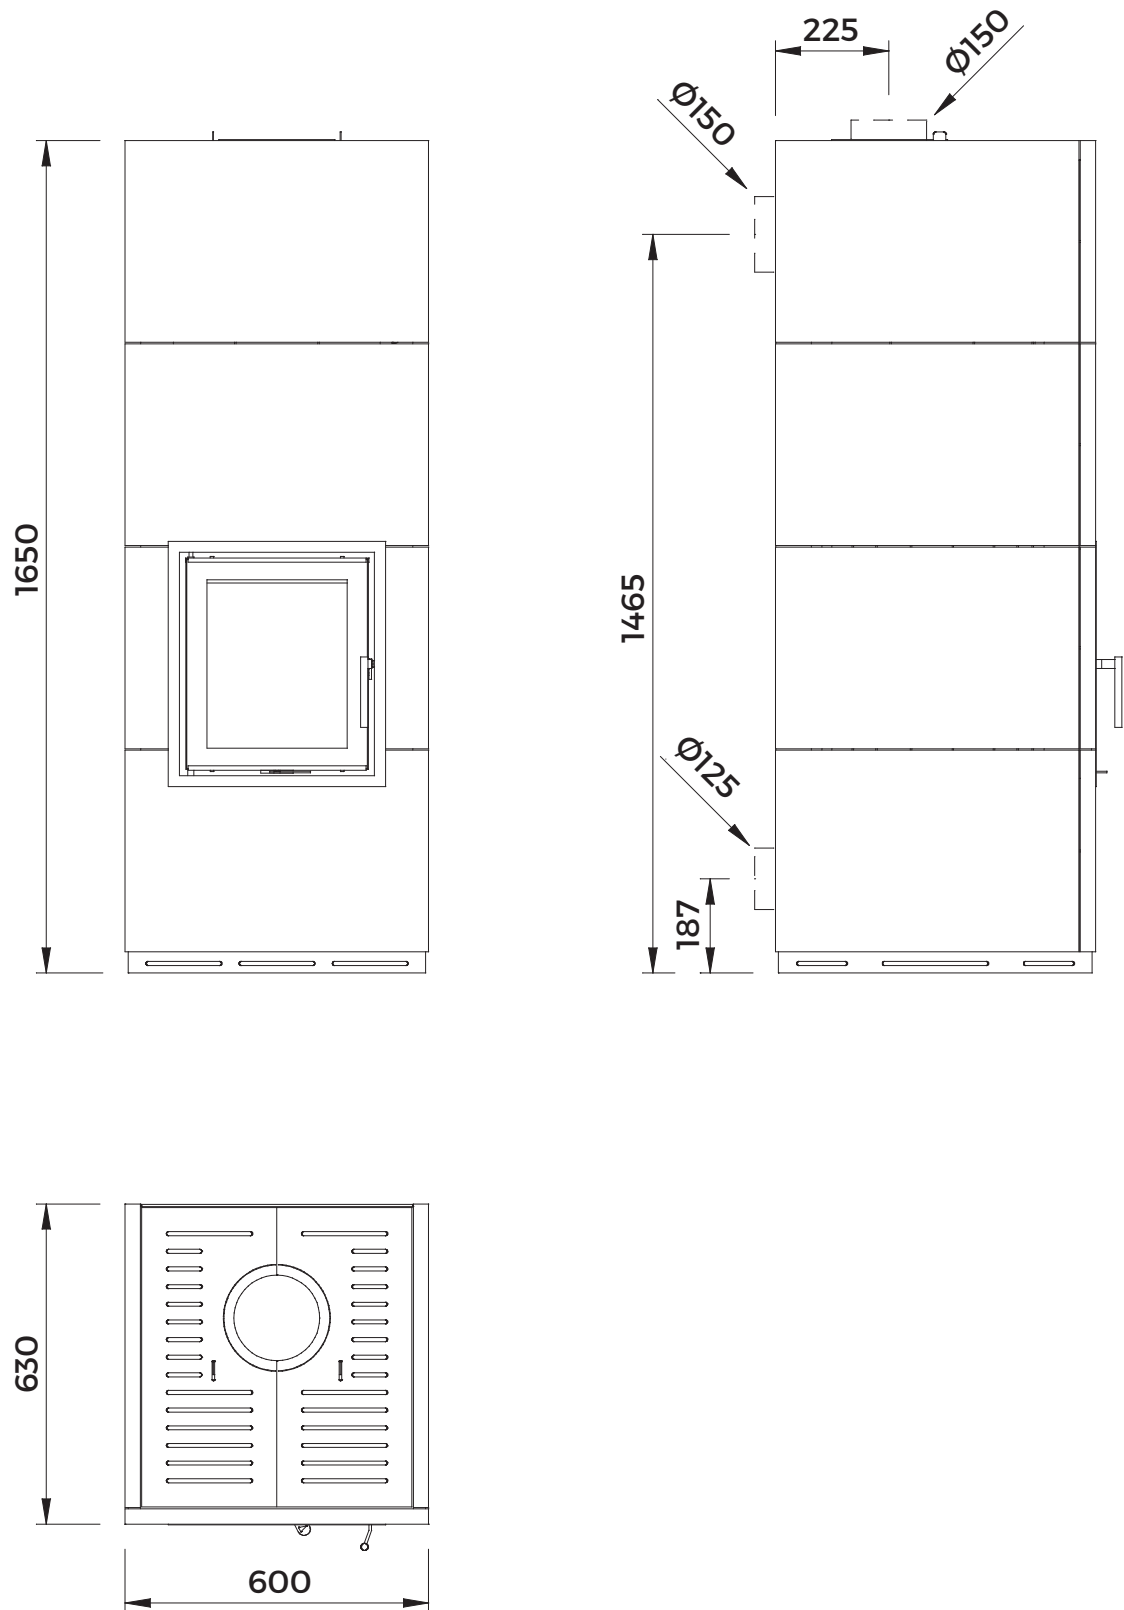

All dimensions expressed in millimetres